

# EVO CUBE Indbyg

- Lifetime up to 50000hrs, covered by 5 years limited warranty
- Excellent dimming performance on various dimmers
- Cut-out size 68-83mm
- Percent flicker < 10%
- Adjustable accent luminaire features 30° vertical and 350° horizontal aiming
- IP44 rated, suitable for damp locations

## Light Color



Typical CRI: Ra 97 R9>85

## Housing Material


Heatsink – Aluminum Alloy  
Reflector- Polycarbonate

Finishing - White/Black


## IP Rating

IP54

## Energy Label



## Dimension Drawing

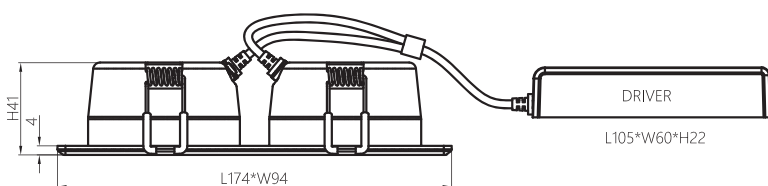

Watt	Voltage	Flux*	CCT	CRI*	BA	CBCP	SDCM	Finishing
13.5W	220-240Vac	1050lm	2700K	Ra97	25D	3000cd	3 steps	White
13.5W	220-240Vac	1050lm	2700K	Ra97	38D	2000cd	3 steps	White
13.5W	220-240Vac	1050lm	2700K	Ra97	60D	1000cd	3 steps	White
13.5W	220-240Vac	1100lm	3000K	Ra97	25D	3000cd	3 steps	White
13.5W	220-240Vac	1100lm	3000K	Ra97	38D	2000cd	3 steps	White
13.5W	220-240Vac	1100lm	3000K	Ra97	60D	1000cd	3 steps	White
13.5W	220-240Vac	1050lm	2700K	Ra97	25D	3000cd	3 steps	Brushed
13.5W	220-240Vac	1050lm	2700K	Ra97	38D	2000cd	3 steps	Brushed
13.5W	220-240Vac	1050lm	2700K	Ra97	60D	1000cd	3 steps	Brushed
13.5W	220-240Vac	1100lm	3000K	Ra97	25D	3000cd	3 steps	Brushed
13.5W	220-240Vac	1100lm	3000K	Ra97	38D	2000cd	3 steps	Brushed
13.5W	220-240Vac	1100lm	3000K	Ra97	60D	1000cd	3 steps	Brushed

\* Flux: light output value was measured after 30 mins operation under Ta:25° C, input voltage 230Vac

\* CRI: a max tolerance ±2 on CRI is acceptable in any condition

