


ALED

# London



- > Levetid 50.000 timer L80B10
- > Lysspredning 90° ned og 110° op.
- > Komfortabel belysning med lav blænding / UGR<18
- > 5 års garanti.

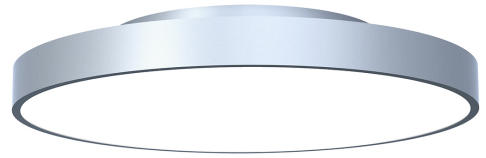

Model	Ø350 30%uplight / 70%downlight	Ø450 30%uplight / 70%downlight	Ø600 30%uplight / 70%downlight	Ø900 30%uplight / 70%downlight
Spænding	AC 100V-240V			
Frekvens	50Hz-60Hz			
Cosinus phi	> 0.9			
UGR	< 18			
Effekt	18W	30W	48W	80W
Farvetemperatur kode	830 / 840			
Farvegengivelsesindeks	Ra > 80			
Farvetemperatur	3000K / 4000K			
Lumen	110 lm/w			
SDCM	SDCM 3			
Gnsntl. levetid ved 25 °C	> 50.000 Timer L80B10@25 °			
LED	LED			
Type	LED Panel			
Dimensioner	Ø350 x 82 mm	Ø450 x 82 mm	Ø600 x 82 mm	Ø900 x 82 mm
Arbejdstemperatur	-20°C / +45°C			
Kapslingsklasse	IP 20			
Energi klasse	A+			
Tilvalg	DALI, 1-10V Dæmp, Casambi, Sensor, SOCIL			



