



Physical Dimension(MM)

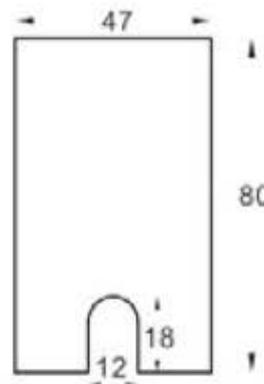

Model A

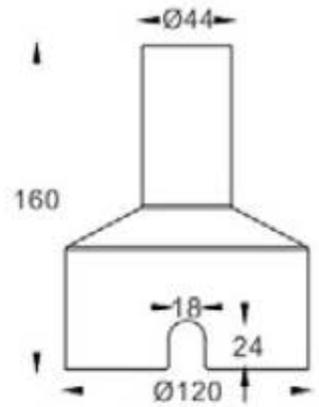

Model B

Mounting Sleeve

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
DM-UPL520102A	2-3W	1PCS CREE/OSRAM /LUMINUS SMD	2200-6500K R/G/B/Y/A	5°/8°/10° /12°/25°/40°/60°	AC110-240V	ON/OFF
DM-UPL520102B	2.5W				DC12V/DC24V /DC36V/DC48V	ON/OFF /Triac/0-10V/DALI
DM-UPL520103A	2-3W					DMX512
DM-UPL520102C	2W	1PCS TYANSHINE /EVERCORE	Turnable White 2700K/6500K	25°/40°/60°	DC12V/DC24V	DMX512
DM-UPL520101	1.5W	1PCS TYANSHINE SMD	RGB 3in1			
DM-UPL520102D	2.5W		RGBW 4in1 (W: 2700K/3000K/4000K /5000K/5700K/6500K)		DC24V	
DM-UPL520103B	3W	1PCS CREE/LUMINUS COB	2700K-6500K	24°/36° (Reflector Cup)	AC110-240V	ON/OFF
DM-UPL520103C	2-3W				DC12V/DC24V /DC36V/DC48V	ON/OFF /Triac /0-10V/DALI/DMX512

### Material Specifications

Front cover :Stainless steel SUS316  
 Housing:CNC 6063# aluminum. T=60-80µm Adhesion of ISO class 1/ASTM class 4B  
 high temperature painting  
 Driver:Constant current output,Constant current output  
 Glass:Step tempered glass  
 Mounting sleeve:ABS



Ceiling Recessed



### Features



High colour rendering index



Excellent thermal management



Dimmable versions available



Available in round or square