


Physical Dimension(MM)



Model A

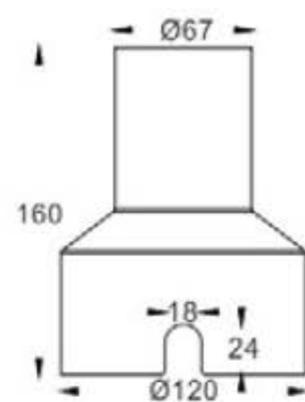

Model B

Mounting Sleeve

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
DM-UPL800305A	5W/7W	3PCS CREE/OSRAM /LUMINUS SMD	2200-6500K R/G/B/Y/A	8°/12°/20°/30° /45°/60°	AC220-240V	ON/OFF /Triac/0-10V
DM-UPL800305B	5W/7W				DC12V/DC24V /DC36V/DC48V	ON/OFF /0-10V/DALI/DMX512
DM-UPL800307A	5W/7W	3PCS TYANSHINE /EVERCORE	Turnable White 2700K/6500K	30°/45°/60°	DC24V/DC36V /DC48V	DMX512
DM-UPL800307B	5W/7W					
DM-UPL800307C	5W/7W	3PCS TYANSHINE SMD	RGBW 4in1 (W: 2700K/3000K/4000K /5000K/5700K/6500K)			
DM-UPL800105A	5W/7W	1PCS CREE SMD	2700K-6500K	6°	AC220-240V	ON/OFF /Triac/0-10V
DM-UPL800107A	5W/7W				DC12V/DC24V /DC36V/DC48V	ON/OFF /0-10V/DALI/DMX512
DM-UPL800105B	5W/7W	1PCS CITIZEN/CREE /LUMINUS COB	2700K-6500K	15°/24°/38° (Lens)	AC220-240V	ON/OFF /Triac/0-10V
DM-UPL800107B	5W/7W				DC12V/DC24V /DC36V/DC48V	ON/OFF /0-10V/DALI/DMX512
DM-UPL800105C	5W/7W			15°/18°/36° (Reflector Cup)	AC220-240V	ON/OFF /Triac/0-10V
DM-UPL800107C	5W/7W				DC12V/DC24V /DC36V/DC48V	ON/OFF /0-10V/DALI/DMX512

Material Specifications

Front cover :Stainless steel SUS316
 Housing:CNC 6063# aluminum.T=60-80µm Adhesion of ISO class 1/ASTM class 4B
 high temperature painting
 Driver:Constant current output,Constant current output
 Glass:Step tempered glass
 Mounting sleeve:ABS



Ceiling Recessed



Features



High colour rendering index



Excellent thermal management



Dimmable versions available



Available in round or square