



RGR 3 in 1



RGRW 4 in 1

CREE




IP68 Connector

DALI/1-10V
Triac/PWM

CRI>80/90

IP67

IK10

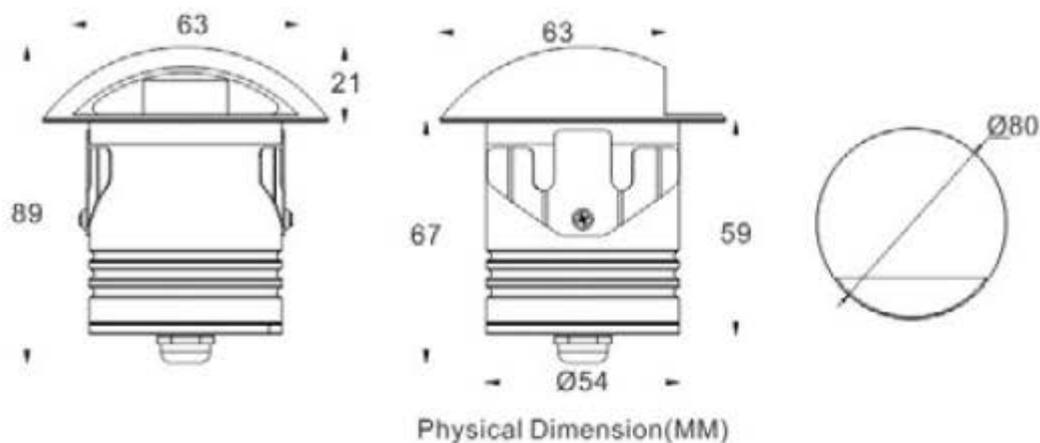

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	LIGHTING EFFECT	INPUT VOLT	CONTROL
DM-SIG800106	6W/7W/8W	1PCS CREE /TYANSHINE	2700K-6500K	1/2/3/4 Emitting Holes	AC220V-240V	ON/OFF /Triac
DM-SIG800107A	5-7W				DC12V/DC24V /DC36V/DC48V	ON/OFF/0-10V/DALI /Triac/PWM/DMX512
DM-SIG800107B	7W	1PCS TYANSHINE /EVERCORE	Tunable White 2700/6500K		DC24V	DMX512
DM-SIG800105	5W	1PCS TYANSHINE	RGB 3in1			
DM-SIG800107C	7W		RGBW 4in1 (W:3000K/4000K/6500K)			

Material Specifications

Front cover :Aluminum/Stainless steel SUS304#

Housing:CNC 6063# aluminum.T=60-80µm Adhesion of ISO class

1/ASTM class 4B high temperature painting


Driver:Constant current output

Glass:Step tempered glass

Power Cable:H05RN-F 2*1.0MM2 L=0.5M (Low voltage),H05RN-F

3*1.0MM2 L=0.5M (High voltage)

Lighting Effect

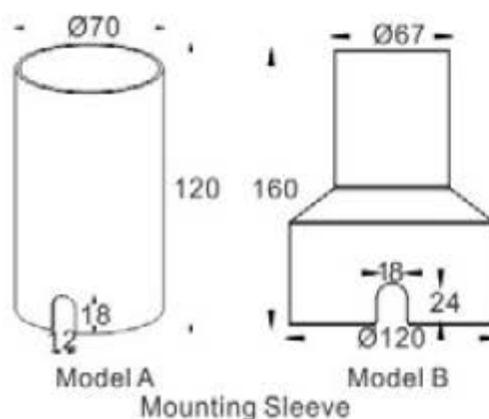

Features



High colour
rendering index



Excellent thermal
management



Dimmable versions
available



EMC-optimised