



RGB 3 in 1



RGBW 4 in 1


CREE

IP68 Connector
DMX512 DC24V AC220VDALI/1-10V
Triac/PWM


CRI>80/90

IP67

IK08

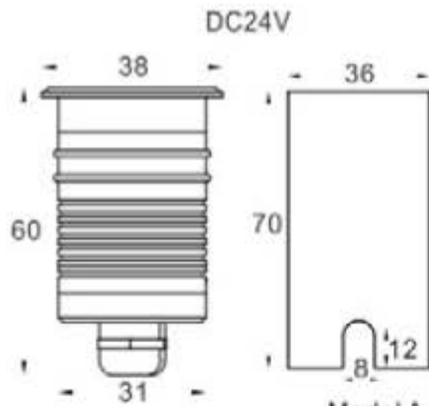

Physical Dimension(MM) Mounting Sleeve

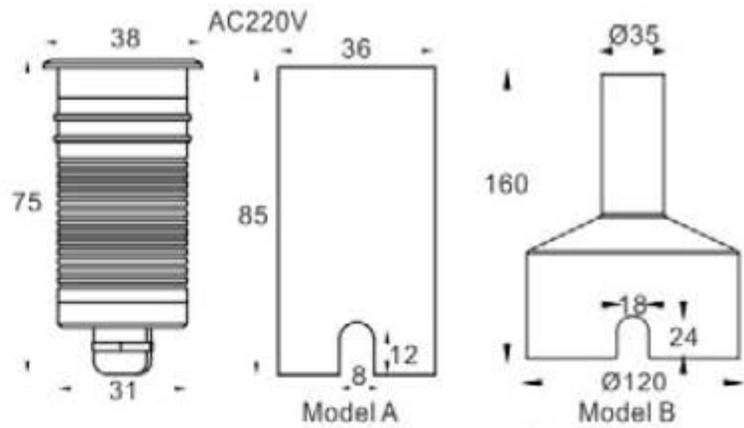

Mounting Sleeve

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
DM-UPL380101A	1-1.5W	1PCS CREE/OSRAM LUMINUS SMD	2200-6500K R/G/B/Y/A	12°/25°/40°/60°	AC110-240V	ON/OFF
DM-UPL380101B	1-1.5W				DC12V/DC24V /DC36V/DC48V	ON/OFF /Triac/0-10V/DALI
DM-UPL380102A	2W	1PCS TYANSHINE /EVERCORE	Turnable White 2700K/6500K	25°/40°/60°	DC12V/DC24V	DMX512
DM-UPL380102B	2W					
DM-UPL380101C	1.5W	1PCS TYANSHINE SMD	RGB 3in1			
DM-UPL380102C	2W	1PCS TYANSHINE SMD	RGBW 4in1 (W: 2700K/3000K/4000K /5000K/5700K/6500K)			

IV

RECESSED
IN-GROUND LIGHTProduct
Index

Material Specifications

Front cover :Stainless steel SUS316
Housing:CNC 6063# aluminum.T=60-80µm Adhesion of ISO class 1/ASTM class 4B
high temperature painting
Driver:Constant current output,Constant current output
Glass:Step tempered glass
Mounting sleeve:ABS



Inground Recessed



Features

High colour
rendering indexExcellent thermal
managementDimmable versions
available

EMC-optimised