



RGB 3 in 1



RGBW 4 in 1

CREE ⇄




IP68 Connector

DALI/1-10V
Triac/PWM


CRI>80/90

IP67


IK08

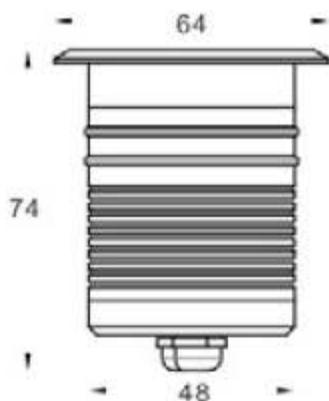

Physical Dimension(MM)

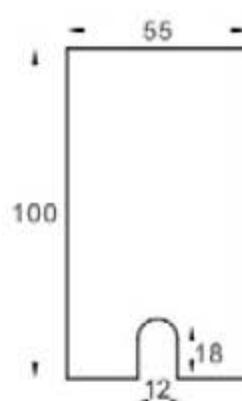

Model A

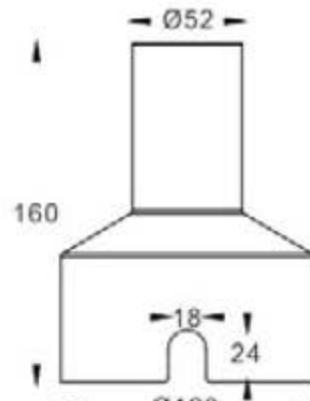

Mounting Sleeve

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
DM-UPL640103A	3W/5W	1PCS CREE/OSRAM /LUMINUS SMD	2200-6500K R/G/B/Y/A	20°/40°	DC12V/DC24V	DMX512
DM-UPL640103B	3-5W	1PCS TYANSHINE /EVERCORE	Turnable White 2700K/6500K			
DM-UPL640105A	3W	1PCS TYANSHINE SMD	RGB 3in1			
DM-UPL640105B	4W		RGBW 4in1 (W: 2700K/3000K/4000K /5000K/5700K/6500K)			
DM-UPL640103C	3W	1PCS CREE SMD	2700K-6500K	6°	AC220 /AC110-240V	ON/OFF
DM-UPL640105C	3-5W				DC12V/DC24V	ON/OFF /DMX512
DM-UPL640103D	3W	1PCS CREE /LUMINUS COB	2700K-6500K	15°/24°/38°/60° (Lens)	AC110-240V	ON/OFF
DM-UPL640105D	3-5W				DC12V/DC24V	ON/OFF /DMX512
DM-UPL640103E	3W	1PCS CREE /LUMINUS COB	2700K-6500K	18°/25°/35° (Reflector Cup)	AC220 /AC110-240V	ON/OFF
DM-UPL640105E	3-5W				DC12V/DC24V /DC36V/DC48V	ON/OFF /Triac /0-10V/DALI/DMX512

Material Specifications

Front cover :Stainless steel SUS316

Housing:CNC 6063# aluminum.T=60-80µm Adhesion of ISO class 1/ASTM class 4B
high temperature painting

Driver:Constant current output,Constant current output

Glass:Step tempered glass

Mounting sleeve:ABS



Inground Recessed



Features



High colour
rendering index



Excellent thermal
management



Dimmable versions
available



EMC-optimised