


UTAH LINE G2 PRO

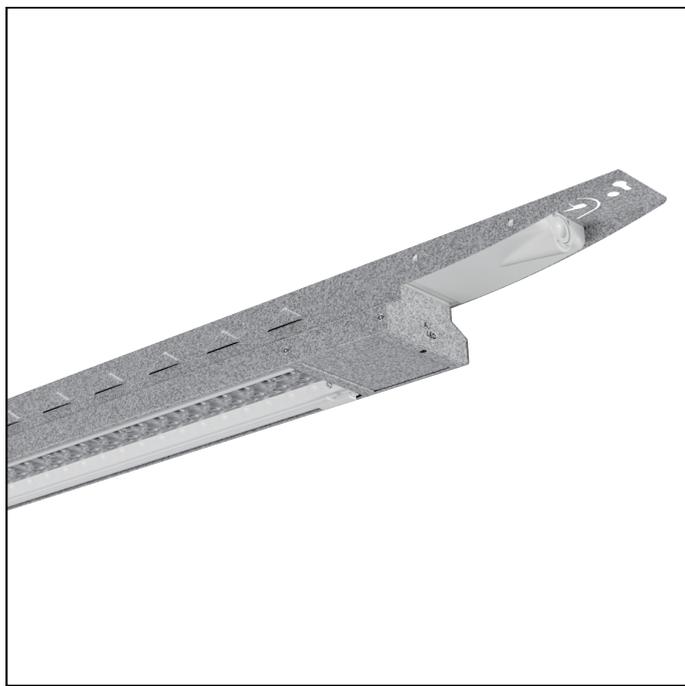

Produkt information

UTAH LINE G2 PRO er et industriarmatur designet til maksimal ydeevne og lang levetid. Hurtig og nem montage direkte på loft, med justerbart beslag eller i wire. Vores specialudviklede optik sikrer en UGR på under 25 trods den høje lumenpakke. DALI2 udgaven leveres som CLO og sikrer samme lysstrøm gennem hele produktets levetid. Armaturet er lavet i ekstra lang udgave, hvilket sikrer, at eksisterende installationskabler kan genanvendes uden at skulle forlænges. .

Product data

General Information

Light source	3030 LED chips
LED modular	1 piece
Beam angle	90°
Kelvin	4000K
CRI	>80
Replaceable light source	Yes
Number of drivers	1 piece
Driver included in the product	Yes
Replaceable driver	Yes

L100	100.000 hrs
Lumen output	18092 lm

Elektrisk info

Input Voltage	200-240VAC / 176-276VDC
Input frequency	50/60Hz
System wattage	97W Max
Inrush current	5 A pk
Inrush time	900 us
Power factor	0.96
Leakage current	< 0.7mA
Max. number of units B16 fuse	22
Max. number of units C10 fuse	23
Max. number of units C16 fuse	36
Surge transient protection	4 kV (L-N) / 4 kV (L/N-PE)
Operating temperature range ta	-25°C to + 55°C
Maximum case temperature tc	85°C

SDCM	<3
Optics	Lens
Function	On/Off - DALI 2
Connect	3pcs of 5- pole terminal block
Protection class	Class I
Glow wire	650°C, 30 seconds
UGR 4H 8H	21.3 / 24.6
PstLM	< 1
SVM	< 0.4
CE Mark	Yes
EU RoHS	Yes
Net weight	4.65 Kg

Dimensioner



Length	1760 mm
Width	113 mm
Depth	80 mm

Armatuur

Housing	Zinc
Optic material	Polycarbonate
Housing color	Grey
Heatsink material	Aluminium
IP degree	IP23
IK degree	IK07

Diverse

LED driver failure rate at 10,000hrs, TC=75° , max. 10%	
Standby power consumption	<0.25W

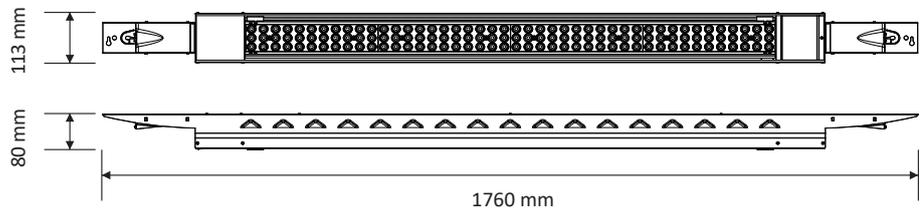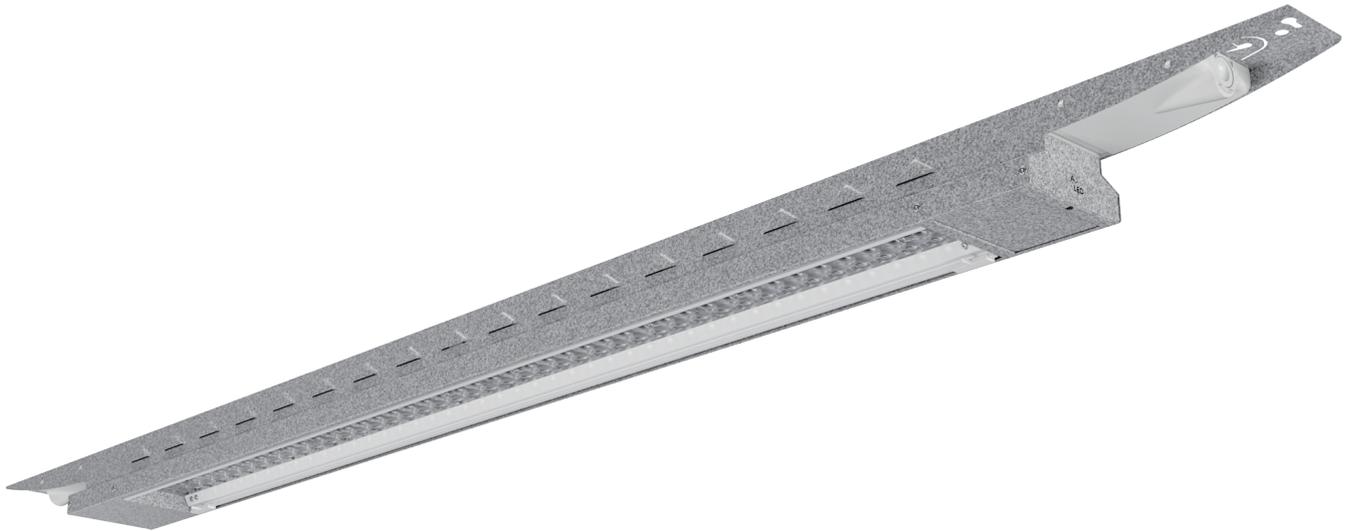

Reflectance of Ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimension		Viewed crosswise					Viewed endwise				
x	y										
2H	2H	21.5	22.8	21.8	23.1	23.4	24.3	25.6	24.6	25.9	26.2
	3H	21.4	22.6	21.8	22.9	23.3	24.5	25.7	24.9	26.1	26.4
	4H	21.3	22.4	21.7	22.8	23.2	24.6	25.7	25.0	26.1	26.4
	6H	21.3	22.3	21.7	22.7	23.1	24.7	25.7	25.1	26.1	26.5
	8H	21.2	22.2	21.6	22.6	23.0	24.6	25.6	25.1	26.0	26.4
	12H	21.2	22.1	21.6	22.5	22.9	24.6	25.6	25.0	26.0	26.4
4H	2H	21.5	22.6	21.9	23.0	23.3	24.1	25.2	24.5	25.6	26.0
	3H	21.4	22.3	21.8	22.7	23.1	24.4	25.3	24.8	25.7	26.1
	4H	21.4	22.2	21.8	22.6	23.1	24.5	25.4	25.0	25.8	26.2
	6H	21.3	22.0	21.8	22.5	22.9	24.6	25.3	25.0	25.7	26.2
	8H	21.3	21.9	21.7	22.4	22.8	24.6	25.3	25.1	25.7	26.2
	12H	21.2	21.8	21.7	22.3	22.8	24.6	25.2	25.1	25.7	26.2
8H	4H	21.3	21.9	21.8	22.4	22.9	24.4	25.1	24.9	25.5	26.0
	6H	21.2	21.7	21.7	22.2	22.7	24.4	25.0	24.9	25.5	26.0
	8H	21.2	21.7	21.7	22.2	22.7	24.5	25.0	25.0	25.5	26.0
	12H	21.2	21.6	21.7	22.1	22.6	24.5	24.9	25.0	25.4	25.9
12H	4H	21.3	21.9	21.7	22.3	22.8	24.4	25.0	24.9	25.4	25.9
	6H	21.2	21.7	21.7	22.2	22.7	24.4	24.9	25.0	25.4	25.9
	8H	21.2	21.6	21.7	22.1	22.6	24.5	24.8	25.0	25.4	25.9