

A**CSP LED STRIP****LED**

A LED A/S Hammeren 6, DK-6800 Varde www.aled.dk Tel: +45 7199 5354




CSP Strip-320LED/m 24V

Electrical Data

· Number Led/M	:320pcs
· Power W/m±10%	:9.6W
· PCB Width	:8mm
· CRI	: 90
· Max length	: 10m
· Cut Size	:50mm

Standards / Normative Requirements

· Eye security	: IEC 62471
· Protection class	: EN 60529
· Safety Requirements	: EN 62031 IEC 60598-1
· EMC / radio disturbance characteristics	: EN 55015
· ROHS	:Yes
· CE	:Yes

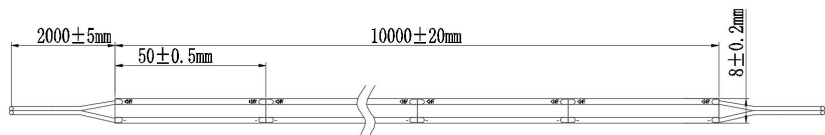

Product Parameters

Part No.CSP	CCT(K)	CRI	Pow(W/m)	LM/W	LM/M	V/ DC	IP (Optional)
570205962710	2700	90	9.6	88	845	24	54
570205963010	3000	90	9.6	93	890	24	54
570205964010	4000	90	9.6	96	920	24	54

Cautions:

1. The given data are typical value, Due to tolerances of the production process and electrical components, electrical power can be ±10%
2. Up to 14.4W/M(4.39W/feet)no need for additional heat sinking on Alu pro le, if more than 14.4W/M(4.39W/feet) must be used the heat sinking.